


H7013B/8013 Hydraulic Chair Assembly

Your chair ships in 2 boxes. Please open and inspect the contents to locate the following parts in **Box 2 of 2**:

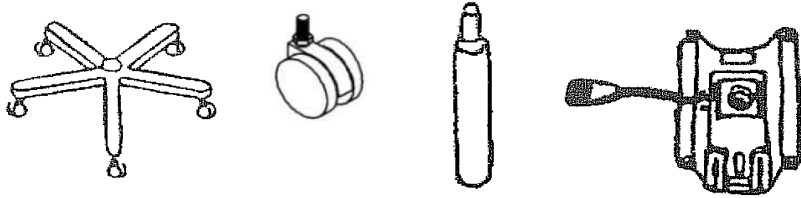

Base -1 Casters- 5 Cylinder -1 Mechanism-1

Box 1 of 2 contains the Seat assembly and back.

ASSEMBLY STEPS

Step 1: Press the casters into holes in bottom of base. Turn base upright. Place cylinder into base with the narrow end up as pictured above and *Figure A*.

Step 2: On underside of seat assembly locate 4 anchors installed in the wood and arrow pointing to edge. Place mechanism with handle pointed in direction of arrow and holes in corners over anchors.

Step 3: Load lock washer and flat washer over the bolt as in *Figure B* and insert bolt into anchor in wooden seat assembly. Tighten with Hex Wrench.

Step 4: Fit seat unit on silver end of cylinder in base. Lift handle on mechanism to raise seat.

Step 5: Attach the back to seat assembly. Insert 2-1/2" bolts through hole in chair back and seat. *Figure C*

Step 6: Lift the back edge of seat to open and screw nuts on bolts. Tighten with screwdriver while holding nuts with Wrench provided.

Enjoy your chair!

If any missing or damaged items or questions, contact Customer Service 1-800-533-7347 or email CS@arrowcabinets.com

Hardware bag in Box 1	
Wrench-1	
Hex Wrench -1	
Bolt-4	
Lock Washer-4	
Flat Washer- 4	
2-1/2" long	
Bolts -2	
Nuts -2	




Figure A



Figure B




Figure C